

AC charging cable - EV- T2M3PC-3AC32A-7,0M6,0ESBK00 - 1622110

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Mobile AC charging cable with vehicle connector and infrastructure plug, with protective cap, Type 2, IEC 62196-2, 32 A / 480 V (AC), Design line D-Line, Cable: 7 m, black, straight, NOTE: Cable management may be required., Mating face: gray, Handle area: gray

Article description

Mobile AC charging cable with Vehicle Connector and Infrastructure plug for charging electric vehicles (EV) with alternating current (AC), via type 2 Vehicle Inlets, compatible with type 2 Infrastructure Socket Outlets at charging stations for E-Mobility (EVSE)

Your advantages

- Uniform design of all Phoenix Contact Vehicle Connectors and Infrastructure Plugs
- Silver-plated surface of the power and signal contacts
- Production in accordance with ISO TS 16949
- Material data available in the IMDS (International Material Data System of the automotive industry)
- Ergonomic handle

Key commercial data

package_quantity	1
GTIN	4055626010847

Technical data

Product definition

Product type	Mobile AC charging cable with vehicle connector and infrastructure plug, with protective cap
Type	D-Line
Standards/regulations	IEC 62196-2
Charging standard	Type 2
Charging mode	Mode 3, Case B
Type of charging current	AC 3-phase
Note	NOTE: Cable management may be required.

Dimensions

Vehicle connector width	60.00 mm
Vehicle connector height	102.90 mm
Vehicle connector depth	229.60 mm
Infrastructure plug width	60.00 mm
Infrastructure plug height	102.90 mm

AC charging cable - EV- T2M3PC-3AC32A-7,0M6,0ESBK00 - 1622110

Technical data

Dimensions

Infrastructure plug depth	229.60 mm
Conductor length	7 m

Ambient conditions

Ambient temperature (operation)	-30 °C ... 50 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Max. altitude	5000 m (above sea level)
Degree of protection	IP44 (plugged in)
Degree of protection	IP44 (Protective cap)

Electrical properties

Maximum charging power	26.6 kW
Number of phases	3
Number of power contacts	5 (L1, L2, L3, N, PE)
Rated current of power contacts	32 A
Rated voltage for power contacts	480 V AC
Number of signal contacts	2 (CP, PP)
Rated current for signal contacts	2 A
Rated voltage for signal contacts	30 V AC
Type of signal transmission	Pulse width modulation
Resistor coding	220 Ω (between PE and PP)

Mechanical properties

Insertion/withdrawal cycles	> 10000
Insertion force	< 100 N
Withdrawal force	< 100 N

Design

Design line	D-Line
Housing color	black
Pin connector pattern color	gray
Color handle area	gray
Color protective cap	black
Label	14.1 mm x 44.8 mm (customer logo on request)

Material

Housing material	Plastic
Material connection profile	Plastic
Material handle area	Soft plastic
Material protective cap	Soft plastic
Material surface of contacts	Ag

Cable

AC charging cable - EV- T2M3PC-3AC32A-7,0M6,0ESBK00 - 1622110

Technical data

Cable

Cable structure	5 x 6.0 mm ² + 1 x 0.5 mm ² (prEN 50620, VDE Reg. 8789 class 5)
External cable diameter	17 mm ±0.4 mm
Type of conductor	straight
Outer sheath, material	TPE-U
External sheath, color	black
Minimum bending radius	255 mm (15 x diameter)

Locking

Locking type	No locking option for U-lock
---------------------	------------------------------

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 10;
China RoHS	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Classifications

eCl@ss

eCl@ss 4.0	27141111
eCl@ss 4.1	27141109
eCl@ss 5.0	27141190
eCl@ss 5.1	27059290
eCl@ss 6.0	27279220
eCl@ss 7.0	27440103
eCl@ss 8.0	27449001
eCl@ss 9.0	27144705

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002061
ETIM 5.0	EC002839
ETIM 6.0	EC002839

UNSPSC

UNSPSC 6.01	30211801
UNSPSC 7.0901	39121432
UNSPSC 11	39121432
UNSPSC 12.01	39121432
UNSPSC 13.2	39121522

Approvals

AC charging cable - EV- T2M3PC-3AC32A-7,0M6,0ESBK00 - 1622110

Approvals

Approval details

VDE Zeichengenehmigung	
Nominal voltage UN	480 V
Nominal current IN	32 A
mm ² /AWG/kcmil	6

Accessories

Park position

EV-T2AC-PARK - 1624148



Infrastructure socket outlet

EV-T2M3SE12-3AC32A-0,7M6,0E10 - 1405214




EV-T2M3SE24-3AC32A-0,7M6,0E10 - 1405216



Drawings


AC charging cable - EV- T2M3PC-3AC32A-7,0M6,0ESBK00 - 1622110

Connection diagram

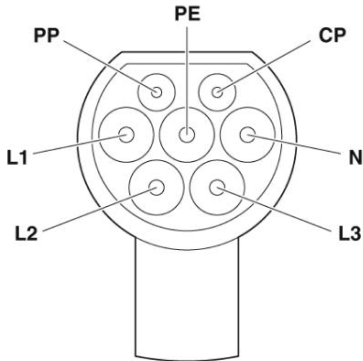


Pin assignment of Infrastructure Plug

Dimensional drawing

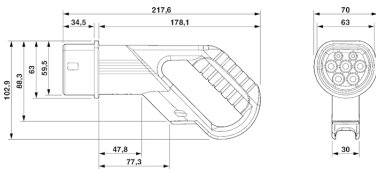


Dimensional drawing of Vehicle Connector

Dimensional drawing

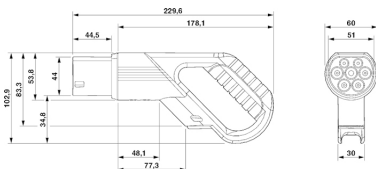

Dimensional drawing of the Infrastructure Plug


Schematic diagram

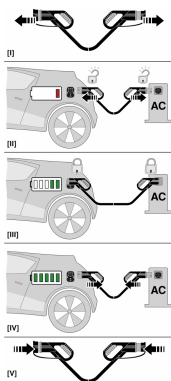

Operating instructions

AC charging cable - EV- T2M3PC-3AC32A-7,0M6,0ESBK00 - 1622110

Schematic diagram

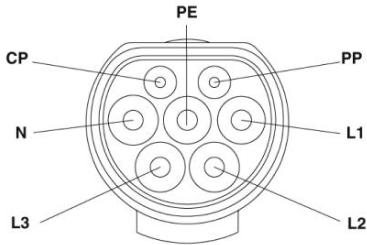

Pin assignment of the Vehicle Connector

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>